

X75

235 - 245W




QUALITY SIGNED AND SEALED

48 CELLS - ALL BLACK FINISHING

**25 YEAR PRODUCT GUARANTEE
OPTIONAL AVAILABLE**

**98% OF NOMINAL POWER GUARANTEED
THE FIRST TWO YEARS**

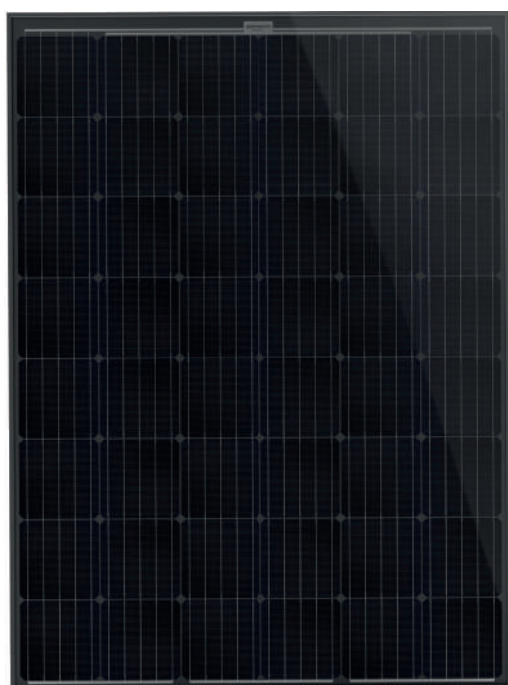

PID FREE

PID tested with excellent results under the harshest conditions



CRAFTED WITH PASSION



**12 YEARS PRODUCT GUARANTEE
UPGRADEABLE TO 25 YEARS AS A
PREMIUM OPTION**



CONSTANTLY HIGH CELL QUALITY
through strict quality examinations
by high-resolution electroluminescence
and infrared measurements



**25 YEARS LINEAR PERFORMANCE
WARRANTY**

aleo solar module X75 HE

ELECTRICAL DATA (STC)		X75L235	X75L240	X75L245
Rated power	P_{MPP} [W]	235	240	245
Rated voltage	U_{MPP} [V]	25.7	26.0	26.3
Rated current	I_{MPP} [A]	9.25	9.34	9.43
Open-circuit voltage	U_{OC} [V]	31.5	31.6	31.8
Short-circuit current	I_{SC} [A]	9.77	9.85	9.94
Efficiency	η [%]	17.6	18.0	18.4

Electrical values measured under standard test conditions (STC): 1000 W/m²; 25°C; AM 1.5

ELECTRICAL DATA (NMOT)		X75L235	X75L240	X75L245
Power	P_{MPP} [W]	176	179	183
Voltage	V_{MPP} [V]	29.8	30.0	30.2
Current	I_{MPP} [A]	5.89	5.97	6.05
Open-circuit voltage	V_{OC} [V]	29.4	29.6	29.7
Short-circuit current	I_{SC} [A]	7.87	7.94	8.00
Efficiency	η [%]	16.5	16.8	17.2

Electrical values measured under nominal module operating temperature : 800 W/m²; 20°C; AM 1.5; wind 1 m/s; Module temperature NMOT: 45.5°C

ELECTRICAL DATA (LOW IRRADIANCE)		X75L235	X75L240	X75L245
Power	P_{MPP} [W]	46	47	48


Electrical values measured under: 200 W/m²; 25°C; AM 1.5

TEMPERATURE COEFFICIENTS			
Temperature coefficient I_{SC}	$\alpha (I_{SC})$	[%/K]	+0.05
Temperature coefficient U_{OC}	$\beta (U_{OC})$	[%/K]	-0.29
Temperature coefficient P_{MPP}	$\gamma (P_{MPP})$	[%/K]	-0.40

BASIC DATA JUNCTION BOX			
Length x width x height	[mm]	148 x 123 x 27	
IP class		IP67	
Cable length	[mm]	1200 (+), 800 (-)	
Connectors		MC4	
Bypass diodes		3	

CLASSIFICATION			
Classification range (positive classification)	[W]	0/+4.99	

DIMENSIONS [mm]

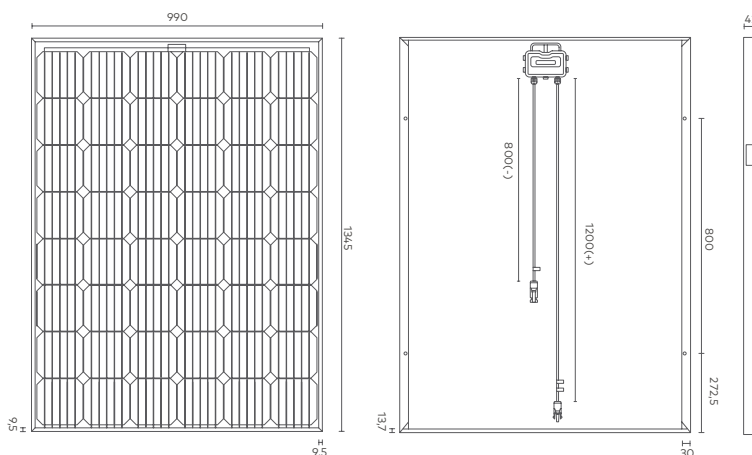

BASIC MODULE DATA		
Length x width x height	[mm]	1345 x 990 x 42
Weight	[kg]	15
Number of cells		48
Cell size	[mm]	156.75 x 156.75
Cell material		Monocrystalline Si, PERC
Number of bus bars		5
Front sheet		Solar glass (TSG)
Back sheet		Polymer sheet, black
Frame material		Al alloy, black


CERTIFICATIONS AND WARRANTY	
Product Guarantee	12 years, optional 25 years
Power Guarantee	25 years – Linear
Fire Resistance	Class C
Protection Against Electric Shock	II
Certifications	IEC 61215, IEC 61730
	IEC 62716 – Ammonia Resistance
	IEC 61701 – Salt mist Resistance
	IEC 62804 – PID Resistance
	MCS 010; MCS 005

LOADS		
Max. module pressure load (Testload)	[Pa]	8000 ¹
Max. module pressure load (Designload) ²	[Pa]	5333 ¹
Max. module suction load (Testload)	[Pa]	2400 ¹
Max. module suction load (Designload) ²	[Pa]	1600 ¹
Max. system voltage	[V _{DC}]	1000
Reverse current load	I_R [A]	20

Mechanical load acc. to IEC/EN 61215
¹ Please observe the mounting conditions in the installation manual
² Testload/ Safety factor 1.5 = Designload

Measurement tolerance of P_{MPP} under STC -3/+3% |
 Accuracy of other electrical values -10/+10%
 Efficiency relating to gross module area

PERFORMANCE GUARANTEE

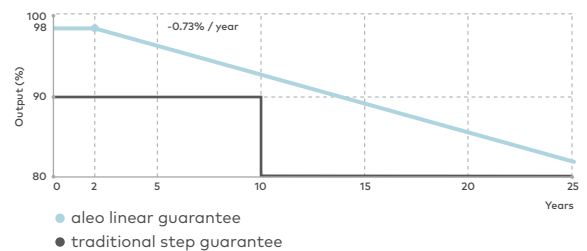

PLEASE CONTACT YOUR AUTHORISED ALEO DEALER

ALEO SOLAR GMBH
 Marius-Eriksen-Straße 1
 17 291 PRENZLAU
 GERMANY

CONTACT
 +49 3984-8328-0
 info@aleo-solar.com
 www.aleo-solar.com

©aleo solar GmbH 08/2018

aleo