


X79 Supercharged 300W

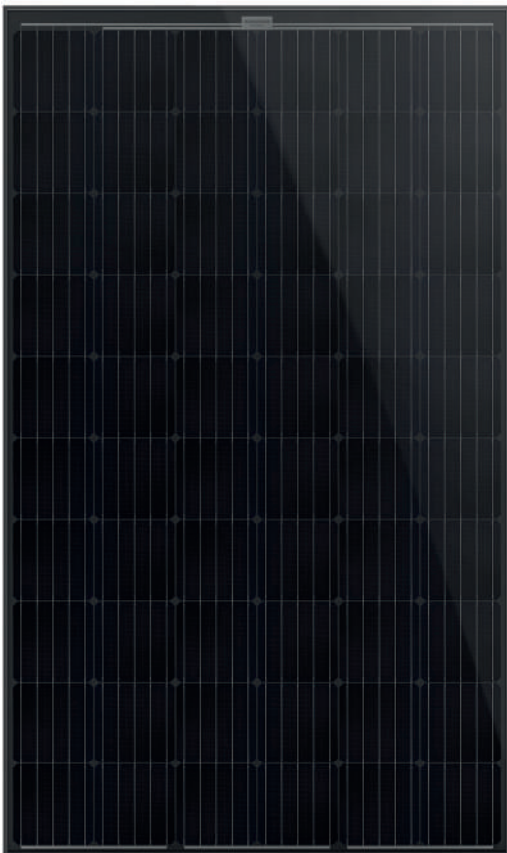

QUALITY SIGNED AND SEALED

ALL BLACK FINISHING

+9.99W POSITIVE SORTING

**100% OF NOMINAL POWER GUARANTEED
THE FIRST TWO YEARS**



PID FREE

PID tested with excellent results under the harshest conditions



**15 YEARS PRODUCT GUARANTEE
UPGRADEABLE TO 25 YEARS AS A
PREMIUM OPTION**



**25 YEARS LINEAR PERFORMANCE
WARRANTY**



**SUPERCHARGED OPTION AVAILABLE
(+6/+9.99 W POWER SORTING OPTION)**



CONSTANTLY HIGH CELL QUALITY
through strict quality examinations
by high-resolution electroluminescence
measurements



CRAFTED WITH PASSION

aleo solar module X79 HE Supercharged

ELECTRICAL DATA (STC)		X79L300
Rated power	P_{MPP} [W]	300
Rated voltage	U_{MPP} [V]	32.3
Rated current	I_{MPP} [A]	9.30
Open-circuit voltage	U_{OC} [V]	39.5
Short-circuit current	I_{SC} [A]	9.81
Efficiency	η [%]	18.3

Electrical values measured under standard test conditions (STC): 1000 W/m²; 25°C; AM 1.5

ELECTRICAL DATA (NMOT)		X79L300
Power	P_{MPP} [W]	222
Voltage	V_{MPP} [V]	29.9
Current	I_{MPP} [A]	7.42
Open-circuit voltage	V_{OC} [V]	36.9
Short-circuit current	I_{SC} [A]	7.90
Efficiency	η [%]	16.9

Electrical values measured under nominal module operating temperature : 800 W/m²; 20°C; AM 1.5; wind 1 m/s; Module temperature NMOT: 45.5°C

ELECTRICAL DATA (LOW IRRADIANCE)		X79L300
Power	P_{MPP} [W]	58


Electrical values measured under: 200 W/m²; 25°C; AM 1.5

TEMPERATURE COEFFICIENTS			
Temperature coefficient I_{SC}	$\alpha (I_{SC})$	[%/K]	+0.05
Temperature coefficient U_{OC}	$\beta (V_{OC})$	[%/K]	-0.29
Temperature coefficient P_{MPP}	$\gamma (P_{MPP})$	[%/K]	-0.40

BASIC DATA JUNCTION BOX	
Length x width x height	[mm] 148 x 123 x 27
IP class	IP67
Cable length	[mm] 1200 (+), 800 (-)
Connectors	MC4
Bypass diodes	3

CLASSIFICATION		
Classification range (positive classification)	[W]	0/+9.99

DIMENSIONS [MM]

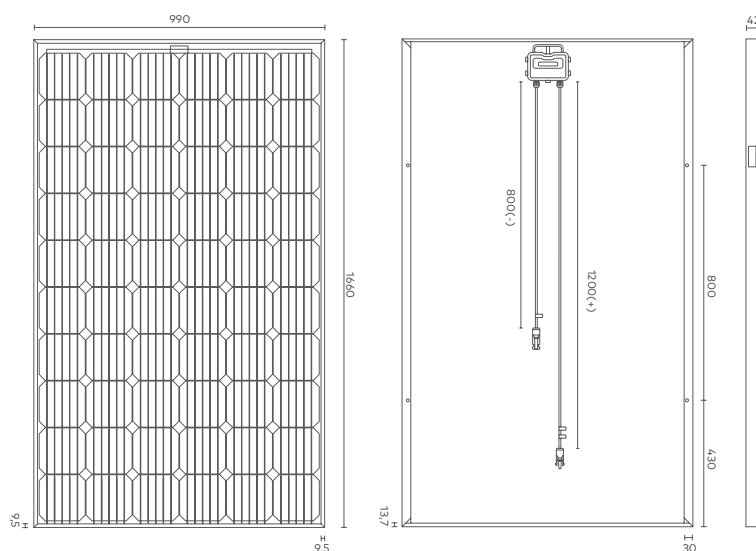

BASIC MODULE DATA	
Length x width x height	[mm] 1660 x 990 x 42
Weight	[kg] 19
Number of cells	60
Cell size	[mm] 156.75 x 156.75
Cell material	Monocrystalline Si
Number of bus bars	5
Front sheet	Solar glass (TSG)
Back sheet	Polymer sheet, black
Frame material	Al alloy, black


CERTIFICATIONS AND WARRANTY	
Product Guarantee	15 years, optional 25 years
Power Guarantee	25 years – Linear
Fire Resistance	Class C
Protection Against Electric Shock	II
Certifications	IEC 61215, IEC 61730 IEC 62716 – Ammonia Resistance IEC 61701 – Salt mist Resistance IEC 62804 – PID Resistance MCS 010; MCS 005

LOADS		
Max. module pressure load (Testload)	[Pa]	8000 ¹
Max. module pressure load (Designload) ²	[Pa]	5333 ¹
Max. module suction load (Testload)	[Pa]	2400 ¹
Max. module suction load (Designload) ²	[Pa]	1600 ¹
Max. system voltage	[V _{DC}]	1000
Reverse current load	I_R [A]	20

Mechanical load acc. to IEC/EN 61215:2016
¹ Please observe the mounting conditions in the installation manual
² Testload/ Safety factor 1.5 = Designload

Measurement tolerance of P_{MPP} under STC -3/+3% |
 Accuracy of other electrical values -10/+10%
 Efficiency relating to gross module area

PERFORMANCE GUARANTEE

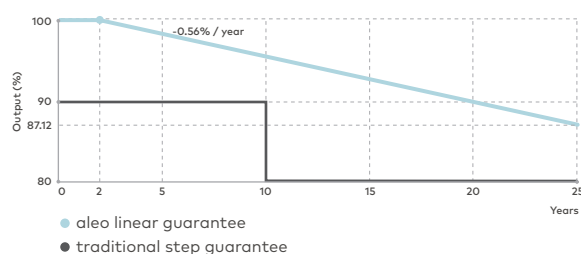

PLEASE CONTACT YOUR AUTHORISED ALEO DEALER

ALEO SOLAR GMBH
 Marius-Eriksen-Straße 1
 17 291 PRENZLAU
 GERMANY

CONTACT
 +49 3984-8328-0
 info@aleo-solar.com
 www.aleo-solar.com

©aleo solar GmbH 03/2019

aleo