


Elegante 200W

 Made in
GERMANY

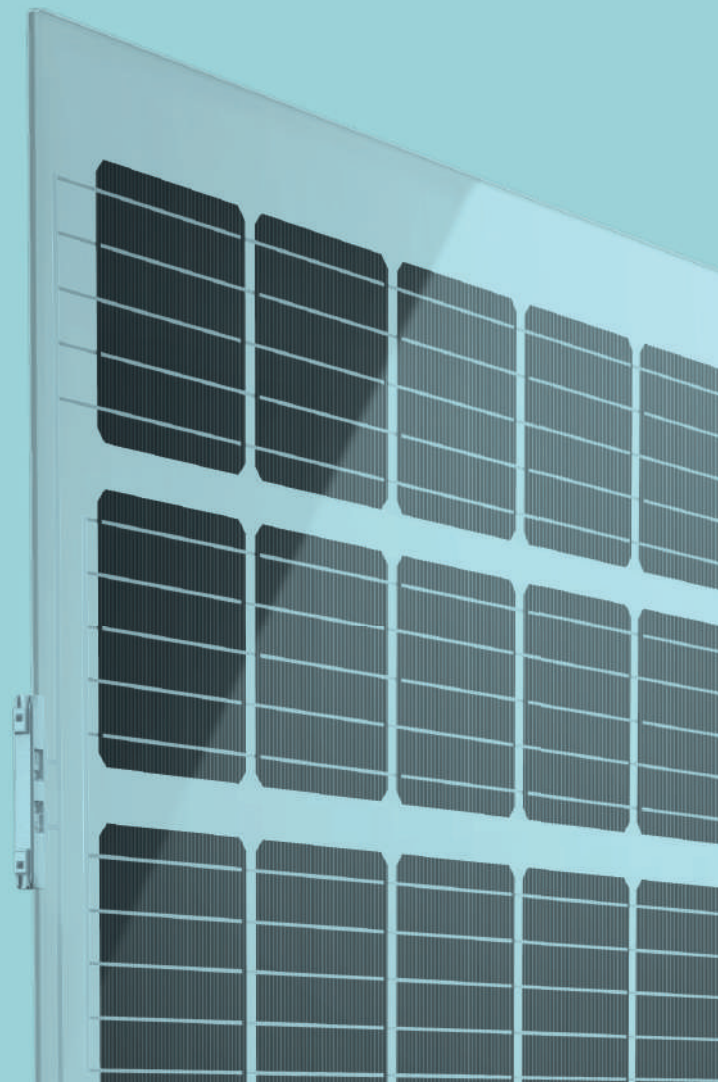

GERMAN ENGINEERING AND MANUFACTURING

Incorporated in 2001, aleo is recognized as one of the most trustworthy manufacturer of solar panels. We produce all our products in our certified production plant in Prenzlau, Germany.

THE BEST GUARANTEE PACKAGE

 30 Years Product Guarantee  30 Years linear Performance Warranty

98% of nominal power guaranteed in the first two years

OUR QUALITY IS CERTIFIED

This module is certified according to the latest technical building rules through the German technical authority DIBt (Deutsches Institut für Bautechnik).

DIBt released to this module the national technical approval abZ (allgemeine bauaufsichtliche Zulassung) for its implementation in architectural applications under safety conditions.

Long-term stability and electrical safety of ELEGANTE have been verified based on the quality and safety criteria as defined in IEC 61215:2016 and 61730-2:2016.

aleo solar PV-safety glass Elegante

ELECTRICAL DATA (STC)		G40C200
Rated power	P_{MPP} [W]	200
Rated voltage	V_{MPP} [V]	21.7
Rated current	I_{MPP} [A]	9.22
Open-circuit voltage	V_{OC} [V]	26.8
Short-circuit current	I_{SC} [A]	9.71
Efficiency	η [%]	13.2

Electrical values measured under standard test conditions (STC): 1000 W/m²; 25°C; AM 1.5

ELECTRICAL DATA (NOCT)		G40C200
Power	P_{MPP} [W]	145
Voltage	V_{MPP} [V]	19.7
Current	I_{MPP} [A]	7.35
Open-circuit voltage	V_{OC} [V]	24.6
Short-circuit current	I_{SC} [A]	7.85
Efficiency	η [%]	11.9

Electrical values measured under nominal operating conditions of cells: 800 W/m²; 20°C; AM 1.5; wind 1 m/s
NOCT: 48°C (nominal operating cell temperature)



BASIC DATA JUNCTION BOX	
Length x width x height	[mm] 105.8 x 15.5 x 12.5
IP class	IP67
Cable length	[mm] 820
Connectors	2 Tyco wing edge
Bypass diodes	2 (one per junction box)

TEMPERATURE COEFFICIENTS			
Temperature coefficient I_{SC}	$\alpha (I_{SC})$	[%/K]	+0.05
Temperature coefficient V_{OC}	$\beta (V_{OC})$	[%/K]	-0.29
Temperature coefficient P_{MPP}	$\gamma (P_{MPP})$	[%/K]	-0.40

Measurement tolerance of P_{MPP} under STC -3/+3% | Accuracy of other electrical values -10/+10%
Efficiency relating to gross PV-safety glass area

DIMENSIONS [mm]

DIMENSIONS JUNCTION BOX [mm]

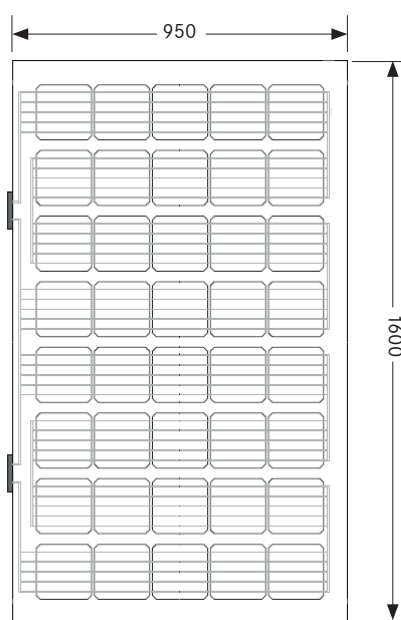

BASIC DATA		
Length x width x height	[mm]	950 x 1600 x 9 (12.5 mm height junction box)
Weight	[kg]	31.5
Number of cells		40
Cell size	[mm]	156.75 x 156.75
Cell material		Monocrystalline Si, PERC,
Number of bus bars		5
Front glass		4.0 mm Solar glass (TSG)
Back glass		4.0 mm Solar glass (TSG)

CERTIFICATIONS AND WARRANTY	
Product Guarantee	30 years
Power Guarantee	30 years
Fire Resistance	Class C
Protection Against Electric Shock	II
Certifications	architectural certification from DIBt


LOADS		
Max. pressure load	[Pa]	7500*
Max. suction load	[Pa]	5400*
Max. system voltage	[V _{DC}]	1000
Reverse current load	I_R [A]	20

Mechanical load acc. to IEC/EN 61215

* Please observe the mounting conditions in the installation manual

ADDITIONAL ELECTRICAL DATA		
Reduction of STC efficiency from 1000 W/m ² to 200 W/m ²	[%] rel.	< 2
Classification range (positive classification)	[W]	0/+9.99

PERFORMANCE GUARANTEE

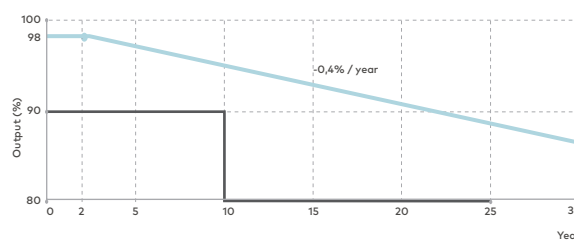

PLEASE CONTACT YOUR AUTHORISED ALEO DEALER

ALEO SOLAR GMBH
Marius-Eriksen-Straße 1
17291 PRENZLAU
GERMANY

CONTACT
+49 3984-8328-0
info@aleo-solar.de
www.aleo-solar.com

©aleo solar GmbH 05/2020

aleo